

THE NEW NEXTWAVE

IK-1


Interactive KIT

EIKI
Projectors & Beyond

Virtual Interactive Projection Kit is

an innovative breakthrough base on opto-electrical technology. With EIKI Virtual Interactive Projection Kit "IK-1" you can virtually create a high-precision touch screen on any form of projection surface (curtain, whiteboard, RP TV, wall, etc.).

Presentations can be controlled more effectively and directly on-screen without the need to move back and forth between the computer and screen.

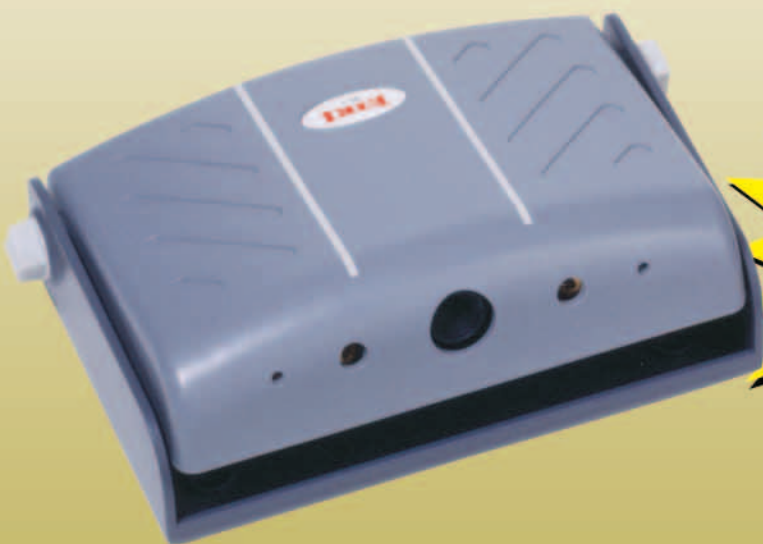

**Suitable
for
Education!**

IK-1 <I-KIT>

Features

- ▼ 1 minute to install the product on the desktop.
- ▼ Support Windows 98 / 2000 / XP / Vista.
- ▼ USB Connection-Fast response time. External power not required.
Length of USB cable from 2m up to 20m(*Option).
- ▼ Use signal pen instead of mouse to achieve single-click and double-click functions. Software included to calibrate your PC image to the screen size.
- ▼ Virtual Whiteboard software and education board software included.
- ▼ Include various demo and teaching functions such as write, erase, label, drag, zoom, reveal, spotlight, screen capture, picture save, screen record and play-back, hand-writing recognition, keyboard input, text input, hyperlink to website, Toggle resource panel and media, etc.
- ▼ Rapid reaction and sensitive operation.
- ▼ Screen size can be up to 300 inch, recommended 150 inch.



Simply use the electric pen to emphasize and highlight key words and subjects, etc....



Interactive KIT



+



**All Kind
of
Notebook PC**

+



**All Kind
of
Projector**

+



**All Kind
of
Surface**

Whiteboard, screen, flat wall or
flat screen (e. g. Plasma, LCD TV
or Projection TV)

Primary School & Higher Education

▼ Spread your idea in your own way !

Business Meeting

▼ Come to the best conclusion!

■ System Requirement & Setup

Model	IK-1
CPU	base on X86 CPU, Pentium 166 or above
Memory	64MB RAM (128MB RAM is recommended)
Hard Disk	30MB free space
USB Port	1.1 or 2.0 USB port
Screen size	UP to 300" (150", recommended)
Power consumption	less than 0.5W (external power is not required)
Receiver dimension	138 (W) × 93 (D) × 45 (H) mm (55.0 degrees angle)
Receiver net weight	200 g
Regelations	FCC, CE,
Standard accessories	Electric pointer (with AA battery) × 1, Signal pen (with AA battery) × 1
	Installation CD, Software Driver × 1 USB cable (2m) × 1, Manual × 1

*Hardware (minimum requirement)

Talk to your EIKI Dealer... the "pro" in projectors.



Eiki Industrial Co., Ltd.

4-12 Banzai-cho, Kita-Ku, Osaka, Japan
Tel: (6) 6311-9479 · Fax: (6) 6311-8486
EIKI World Web Site: <http://www.eiki.com>

**To Make Great
Presentation &
Communication!**

EIKI
Projectors & Beyond

Specifications subject to change without notice.
2007 EIKI International, Inc. Printed in Japan.